





Applications

- Pipe handling equipment
- J-lay friction clamp
- Mooring Winch
- Pull-in winch system
- Safety clamp
- Bell winch
- Spooling winch
- Chain jack
- Linear winch
- S-lay firing line equipment
- Emergency disconnect system
- Umbilical winch
- Tie-in davit crane
- Tensioner

Services

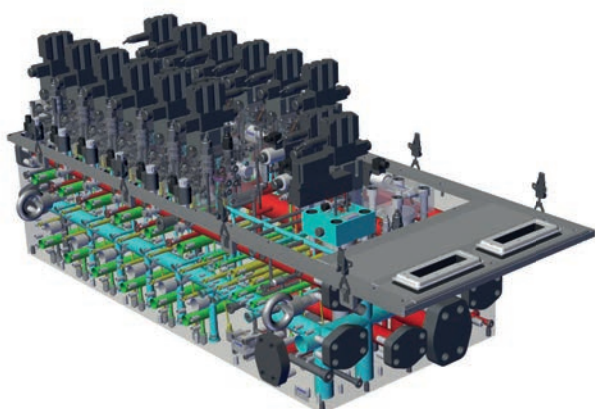

- Manifold, HPU (Hydraulic Power Unit) and Integrated System full engineering
- Fluid dynamics simulation
- Structural calculation
- Deep analysis and check of every single system parameter with specific and official report release
- Final operational test of the whole system
- World Wide commissioning with high level expertise technicians
- Rigid and flexible piping and on-site full assistance
- 40 years-experience in the hydraulic field and a very passionate team of engineers and technicians who work every day close to our customers

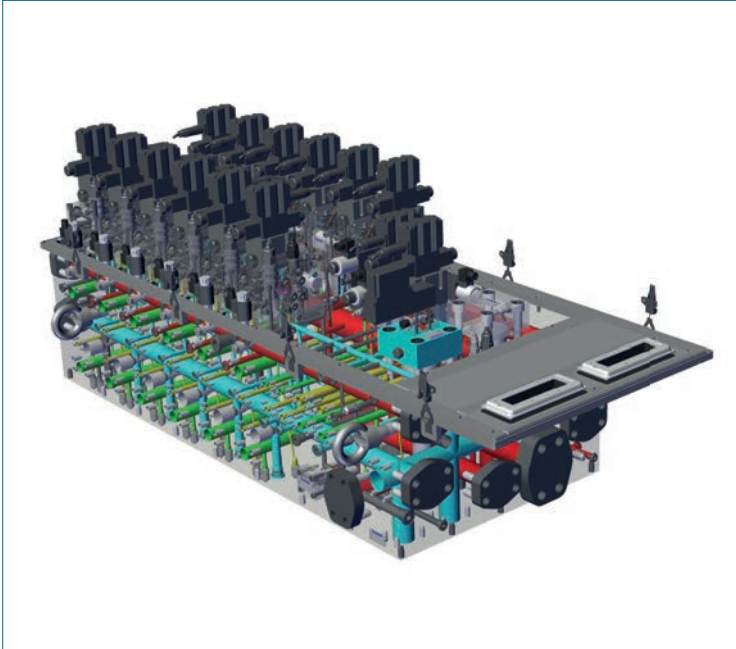

- Aisi 316 valves
- Aisi 316, duplex filters
- Aisi 316 accumulators
- Proportional valves IECEx, ATEX, EAC
- Titanium plate heat exchanger
- Swagelok®, Gyrolok®, Ermeto® fittings
- Aisi 316 tank
- ATEX IECEx accessories

Expertise

Power:	up to 3000 kW [4020 hp]
Flow rate:	up to 16.000 l/min [4227gpm]
Pressure:	up to 420 bar [6000 psi]
Temperature:	-40 °C +60 °C [-40 °F +140 °F]
Certifications:	according to: DNV GL, ABS, BV, RINA, LR, CCS, KR, RMRS, ATEX, SIL requirements
Process Control:	WPS, PQR, NDT, mechanical stress and wearing tests
Engineering international standards:	IEC61508, IEC61511, ASME, EU Directives rules and specifications
Painting:	C5M cycle, based on customer specifications
Surface treatments:	phosphating, electrolytic protections, nitrocarburizing, stainless steel surface finishing
Materials:	AISI 316L, 6MO, duplex, tungum